


sliding panel blinds

measuring instructions


For accurate measurements please use a metal tape measure, and take measurements in centimetres, to the nearest 0.1cm.

- We would recommend that blinds are fixed to the ceiling using the top fix swivel brackets.
- Blinds can be fixed to the face of the window frame or wall with the UEB bracket in conjunction with the top fix swivel bracket.
- Decide whether you want your blind to hang inside or outside of the window recess. **With this blind type, we would recommend having it as large as possible to make the most of the appearance.**
- Please check for the proximity of adjacent walls, furniture, window handles etc. when measuring for your blinds.
- Consider if you want the fabric panels to sit to the side(s) of your window and allow for this when measuring. Panel widths are 30cm, 45cm, and 60cm.
- **Please refer to the style options and ordering guide pages for more information.**

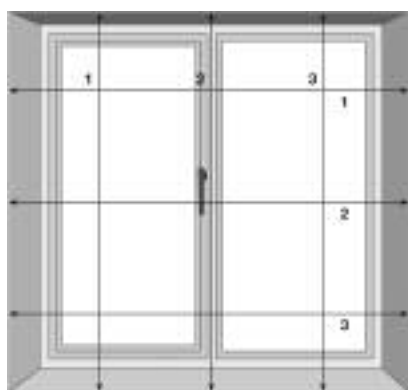

Recess

For blinds to hang inside the window recess:
Measure the drop by taking the measurement from the top of the recess to the window sill or floor, in the three places as shown. Record the smallest measurement. We will make all adjustments to ensure your blinds fit perfectly.

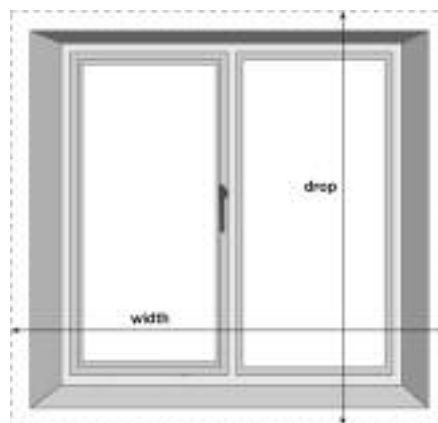

Exact

For blinds to hang outside the window recess:
Measure the exact area you would like to cover, as shown.

aftercare

Look after your blinds by following the straightforward operating instructions below.

Operating

- The cord or wand opens and closes the blind.
- The cord weight hangs onto the cord to act as a stabiliser to keep the cord in place whilst operating.
- The fabric panel is attached with Velcro to the panel runner.

Cleaning - It is essential to clean the panels by the appropriate method.

- It is recommended that you use the upholstery attachment of your vacuum cleaner.
- For heavier spots of dirt, use a well wrung out damp cloth with a very mild solution of detergent to gently wipe the mark.

Your local supplier:

NB: The manufacturer will not accept responsibility for damage to blinds caused by misuse.
Fitting items may vary depending upon type of fitting requested.

sliding panel blinds

fittings



Brackets 1 per 50cm



UEB brackets
(when requested)
1 per 50cm



UEB additional screw



Assembled headrail



Fabric panels

Cord weight - white

Wand - min 1, max 2
(when required)

Screws and rawl plugs

Bottom bar weights - 1
per fabric panel

fitting instructions

Panel blinds will usually be fitted into the ceiling. Allow enough clearance for any obstructions e.g. window handles. If face fixing is required, attach the UEB brackets to the swivel bracket using the additional screw provided.

Attach the brackets to the wall, ceiling or window frame as required, starting at approx. 7cm from each end of the rail and every 50cm in between. Ensure the correct rawl plugs are used in each situation.

Top fix: Screw the brackets to the lintel or ceiling using screws and appropriate rawl plugs.

Face fix: When using a UEB for face fixing, start by assembling the bracket with the swivel bracket using the supplied screw. Fix the brackets in place (see picture below).



Ensure the headrail is the correct way round, with the lip at the front.



Clip the headrail into the swivel bracket and close the lock.



step one

Pull the panel runners across so they are spread across the width of the headrail. Runner positions are pre-set with a 5cm overlap. First panel overlap may be greater depending on the width of the blind.



For cord option: Hang cord weight onto cord.

For wand option: Fix wand onto the wand carrier on the lead panel runner.



step two

Unroll the fabric panels and begin to attach by Velcro onto each panel runner starting at the front.

To attach the fabric panels to subsequent runners, temporarily separate the runners to give enough space to get the fabric on.



step three

Slide the bottom bar weights into the pocket at the bottom of each fabric panel.



step four

step five

step six

WARNING

IN THE INTEREST OF SAFETY, IT IS ADVISABLE TO KEEP ALL PULL CORDS AND CHAIN/BEAD CORDS OUT OF THE REACH OF CHILDREN.